


P PLAN SECTION

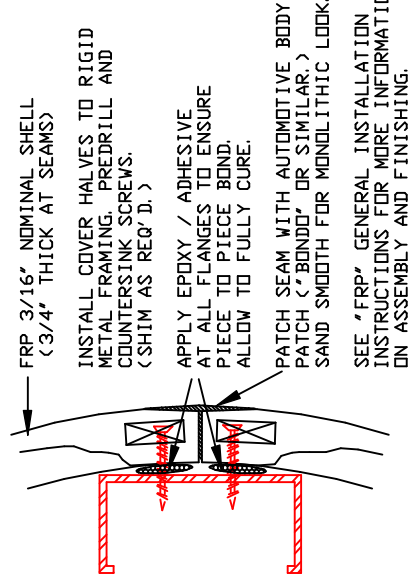

FRP 3/16" NOMINAL SHELL
(3/4" THICK AT SEAMS)

INSTALL COVER HALVES TO RIGID METAL FRAMING. PREDRILL AND COUNTERSINK SCREWS. (SHIM AS REQ' D.)

APPLY EPOXY / ADHESIVE AT ALL FLANGES TO ENSURE PIECE TO PIECE BOND. ALLOW TO FULLY CURE.

PATCH SEAM WITH AUTOMOTIVE BODY PATCH (<"BONDO" OR SIMILAR.>) SAND SMOOTH FOR MONOLITHIC LOOK.

SEE "FRP" GENERAL INSTALLATION INSTRUCTIONS FOR MORE INFORMATION ON ASSEMBLY AND FINISHING.

X VERTICAL SEAM DETAIL

V VERTICAL SECTION

E ELEVATION

FULL, 360°, EXTERIOR, STRAIGHT COLUMN COVER (NO REVEALS, ETC.)
"FRP" (FIELD FINISHED FIBERGLASS REINFORCED POLYESTER)

EXTERIOR COLUMN COVERS:

QUANTITY:	()
DIAMETER:	"
HEIGHT:	"
180° PCS.:	()

PROJECT:	TYPICAL FRP STRAIGHT COLUMN		
MATERIAL:	FRP: 3/16" NOMINAL SHELL THICKNESS		
FINISH:	FIELD: EPOXY SEAMS, PATCH, PAINT		
REVISION:	JOB NO:		
	DRAWN:	05/29/13	
	PAGE:	1	OF: 1