


P PLAN SECTION

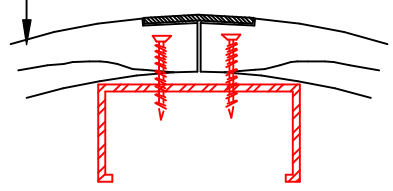

1" THICK AT SEAMS FOR ATTACHMENT. INSTALL COVER HALVES TO RIGID METAL FRAMING. PREDRILL, C' SINK. SCREWS AT TAPE/BED RECESS. (SHIM AS REQ' D.)

APPLY EPOXY / ADHESIVE AT ALL FLANGES TO ENSURE PIECE TO PIECE BOND. ALLOW TO FULLY CURE.

FILL TAPE JOINT RECESS WITH PATCH AND ALKALI RESISTANT MESH TAPE. SAND SMOOTH FOR MONOLITHIC LOOK.

SEE 'GFR' GENERAL INSTALLATION INSTRUCTIONS FOR MORE INFORMATION ON ASSEMBLY AND FINISHING.

X VERTICAL SEAM DETAIL

V VERTICAL SECTION

E ELEVATION

FULL, 360°, EXTERIOR, STRAIGHT COLUMN COVER (NO REVEALS, ETC.)
 "GFR" (FIELD FINISHED GLASS FIBER REINFORCED PORTLAND CEMENT)

EXTERIOR COLUMN COVERS:

QUANTITY:	()
DIAMETER:	"
HEIGHT:	' - "
180° PCS.:	()

PROJECT:	TYPICAL GFR STRAIGHT COLUMN		
MATERIAL:	GFR: 1/2" NOMINAL SHELL THICKNESS		
FINISH:	FIELD: EPOXY, TAPE/BED, PAINT		
REVISION:	JOB NO:		
	DRAWN:	05/29/13	
	PAGE:	1	OF: 1